



Dynapac DFP11


Forward plates





Technical data

 Masses	
Basic mass	103 kg
Net mass	107 kg
Operating mass	108 kg

 Traction	
Max. gradeability	30 %
Max. working speed	30 m/min

 Compaction	
Frequency	90 Hz
Centrifugal force	25 kN
Water tank volume	13.5 l
Nominal amplitude	1.11 mm
Vibration frequency	92 Hz

 Engine	
Manufacturer/Model	Honda GX 160
Emissions according to	Stage V /CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel consumption /h, avg.	1.1 l
Fuel tank capacity	3.1 l
Power	3.6 kW at 3600 rpm

 Drive system	
Drive system	Mechanical


Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac DFP11

Forward plates

Technical data

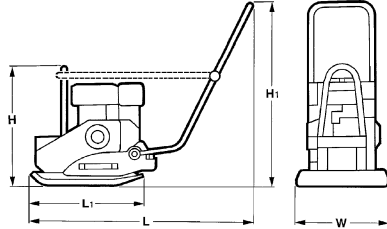

Dimensions	
H. Height	658 mm
H1. Height	962 mm
H2. Height	700 mm
L. Length	1084 mm
L1. Length	542 mm
W. Basic plate width	500 mm



Standard equipment

- Foldable steering handle with vibration isolation
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- All around protection for V-belt
- Protection frame for powerpack
- Recoil starter
- Carrying handles
- One point lift



Optional equipment

- Water sprinkler system 13,5l (+10kg)
- Comfort handle
- Comfort handle, center mount
- Puncture proof transport wheels (+4kg)
- Block paving mat
- Service Kit

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.