



Dynapac DRP15X


Reversible plates





Technical data

 Masses	
Basic mass	137 kg
Operating mass	140 kg

 Traction	
Max. gradeability	30 %
Max. working speed	25 m/min

 Compaction	
Amplitude	1.31 mm
Centrifugal force	25 kN
Frequency	85 Hz
Water tank volume	13.5 l

 Engine	
Manufacturer/Model	Honda GX 160
Emissions according to	Stage V /CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel consumption /h, avg.	1.1 l
Fuel tank capacity	3 l
Power	3.6 kW @ 3600 rpm

 Drive system	
Drive system	Mechanical

Find us locally at www.dynapac.com


We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac DRP15X

Reversible plates



Technical data

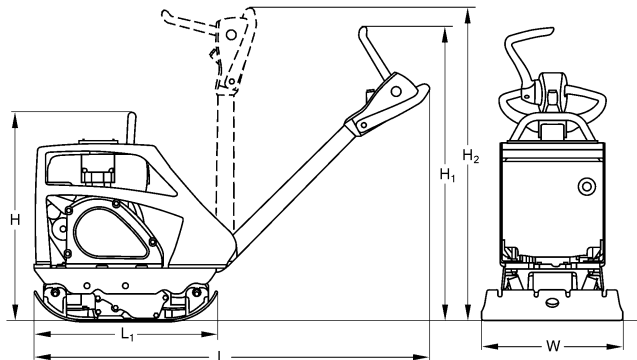

Dimensions	
H. Height	660 mm
H1. Height	870 mm
H2. Height	1220 mm
L. Length	1460 mm
L1. Length	650 mm
W. Basic plate width	500 mm

Standard equipment

- Control handle with vibration isolation
- Height adjustable control lever
- Control lever lock in transport and working position
- Reverse drive protection
- Highly wear resistant base plate
- All around protection hood
- All around protection for V-belt
- Automatic shutdown at low oil level
- One point lift
- Recoil starter

Optional equipment

- Block paving mat
- Puncture proof transport wheels (+4kg)
- Water sprinkler system 12l (+13kg)
- Service Kit

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.